


NOTES:

1 - DRILL ϕ FOR SCREW HOLE POSITIONS TYPICALLY 2.5mm TO 3.0mm
 DEPENDING ON SCREWS USED AND UNLESS OTHERWISE STATED}


2 - DRILL ϕ FOR LOCATION PIN HOLE POSITIONS 4.0mm

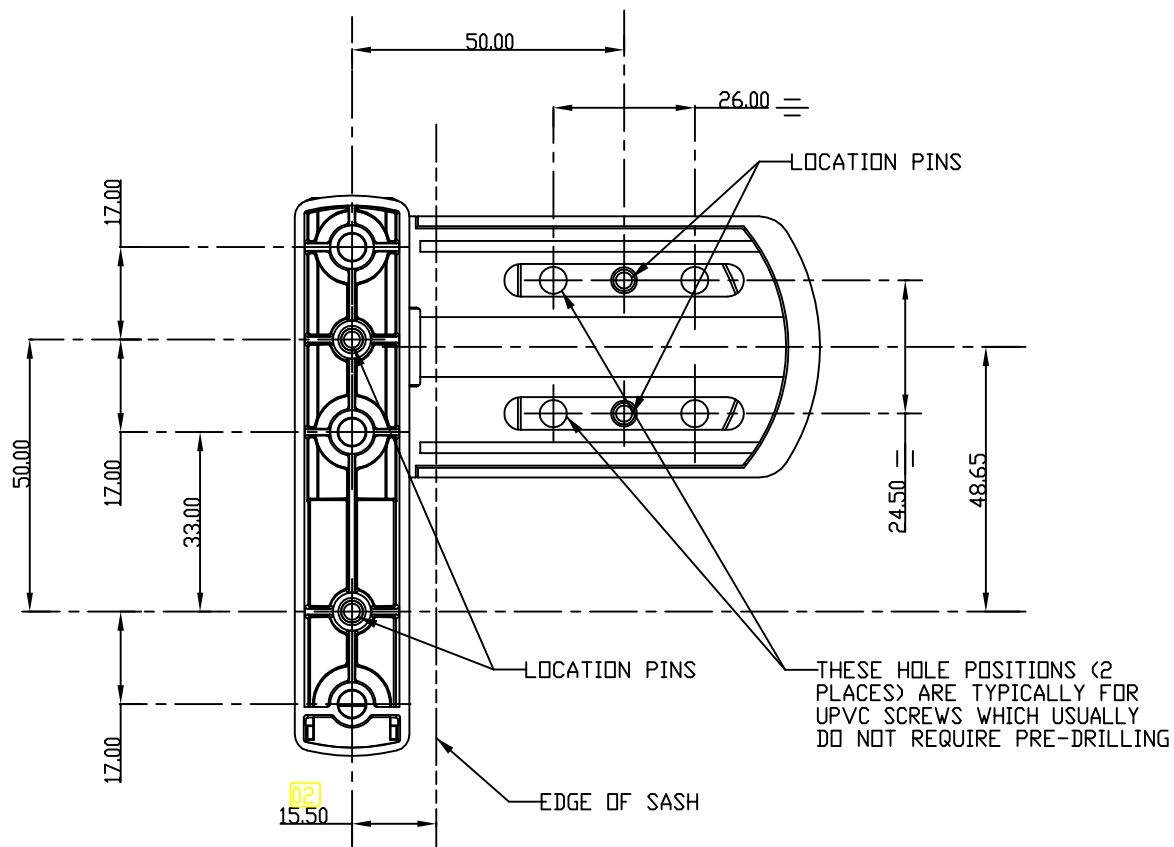

0780 MIDI HINGE
 STANDARD THROW (NOMINAL POSITION)
 FOR PROGRAMMING MACHINE CENTRES

DIM TO EDGE OF SASH CHANGED 15.50 WAS 19.00				02	KD	TJD	05-03-09
FIRST DRAWN				01	KD	TJD	11-02-09
CHANGE DETAILS				ISS.	DR'N	CH'D	DATE
TITLE							A3
DRAWING NUMBER				0780-MIDI-HOLE-CENTRES		0780-MIDI-FLAG-HINGE	
PROJECT No.				DRAWING REF.		ISSUE	

FINISH	n/a	
MATERIAL	SEE COMPONENT DRAWINGS	
VOLUME	SCALE	1.000
CC		



This drawing/document is COPYRIGHT and the property of Trojan Hardware & Design Ltd. It must not be copied (in whole or in part) used for manufacture or otherwise disclosed without prior written consent of the company

© Trojan Hardware & Design Ltd. 1998

STOCK CODE	
DRAWING NUMBER	0780-MIDI-HOLE-CENTRES
PROJECT No.	
DRAWING REF.	
ISSUE	